

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
1 April 2004 (01.04.2004)

PCT

(10) International Publication Number  
**WO 2004/027774 A1**

(51) International Patent Classification<sup>7</sup>: **G11B 20/12**,  
27/034, 27/32, 27/10, 27/34

MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SI, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:  
PCT/IB2003/003556

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(22) International Filing Date: 8 August 2003 (08.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
02078902.0 20 September 2002 (20.09.2002) EP

**Declaration under Rule 4.17:**

— as to applicant's entitlement to apply for and be granted  
a patent (Rule 4.17(ii)) for the following designations AE,  
AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,  
CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES,  
FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH,  
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,  
TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO  
patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG,  
ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU,  
TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE,  
DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT,  
RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

(71) Applicant (for all designated States except US): KONIN-  
KLJKE PHILIPS ELECTRONICS N.V. [NL/NL];  
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): FONTIJN, Wilhel-  
mus, F., J. [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA  
Eindhoven (NL). BERNSEN, Johannes, A., C. [NL/NL];  
c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(74) Agent: MAK, Theodorus, N.; Philips Intellectual Prop-  
erty & Standards, Prof. Holstlaan 6, NL-5656 AA Eind-  
hoven (NL).

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,

(54) Title: RECORDING INFORMATION FOR SEAMLESS PLAYBACK

extent size [KB]	max. bit rate [kbps]	max. data rate [KB/s]
64	291.1	35.5
128	508.8	62.1
256	812.6	99.2
512	1158.4	141.4
1024	1471.5	179.6

(57) Abstract: A disc recording device has a rule based extent allocation strategy. Real-time information like audio is to be reproduced continuously via a rendering system having predefined properties: a buffer, a minimal read-out speed Rdisc, and a maximal seek time Tseek. The information is arranged in files that have a maximal data rate Rfile, and a maximal size of header information Sheaders that precedes

and/or follows the real-time information in the file. The information of the files is recorded in contiguous parts of the track at least having the size of Sextent. The device has an allocation unit (35) for determining a minimal size of an extent Sextent that is a continuous recording unit at least taking into account the properties Rdisc, Tseek, Rfile and Sheaders, in particular according to  
Sextent = ((Tseek + Sheaders / Rdisc)\* Rfile \* Rdisc) / (Rdisc - Rfile).

WO 2004/027774 A1

## Recording information for seamless playback

The invention relates to a device for recording information on a record carrier, the record carrier comprising a track for recording information, which information includes real-time information that is to be reproduced continuously via a rendering system having predefined properties at least including a buffer coupled to a read-out unit, a minimal read-out speed  $R_{\text{disc}}$  of the read-out unit for retrieving information from the track into the buffer, and a maximal seek time  $T_{\text{seek}}$  for accessing information anywhere on the record carrier, the device comprising a head for scanning the track, and a write unit for recording information in the track via the head.

The invention further relates to a device for reading information from a track on a record carrier, which information includes real-time information that is to be reproduced continuously via a rendering system having predefined properties at least including a buffer coupled to a read-out unit, a minimal read-out speed  $R_{\text{disc}}$  of the read-out unit for retrieving information from the track into the buffer, and a maximal seek time  $T_{\text{seek}}$  for accessing information anywhere on the record carrier, the device comprising a head for scanning the track, a read unit for reading information in the track via the head.

The invention further relates to a record carrier comprising a track that carries information, which information includes real-time information that is to be reproduced continuously via a rendering system having predefined properties at least including a buffer coupled to a read-out unit, a minimal read-out speed  $R_{\text{disc}}$  of the read-out unit for retrieving information from the track into the buffer, and a maximal seek time  $T_{\text{seek}}$  for accessing information anywhere on the record carrier.

The invention further relates to a method for recording information and a computer program product for performing the method.

25

A record carrier, and a device and method for recording information are known from patent US 6,219,311. The device has a head and a write unit for recording information in a track on a record carrier like an optical disc. The information on the record carrier is of a real-time type that is to be continuously reproduced at a data rate  $R$ , such as

According to a first aspect of the invention the object is achieved with a device for recording information as defined in the opening paragraph, the information being arranged in files, a file having properties at least including a maximal data rate  $R_{\text{file}}$  of the file for the real-time information in the file to be reproduced continuously, and a maximal size of header information  $S_{\text{headers}}$  that precedes and/or follows the real-time information in the file, the device having an allocation unit for determining a minimal size of an extent  $S_{\text{extent}}$  that is a continuous recording unit at least taking into account the properties  $R_{\text{disc}}$ ,  $T_{\text{seek}}$ ,  $R_{\text{file}}$  and  $S_{\text{headers}}$ , and recording the information of the files in contiguous parts of the track at least having the size of  $S_{\text{extent}}$ .

BNSDOCID: 5WO 000100777, 44 1 2

header information  $S_{\text{headers}}$  that precedes and/or follows the real-time information in the file, and being recorded in contiguous parts of the track at least having a size of  $S_{\text{extent}}$  at least taking into account the properties  $R_{\text{disc}}$ ,  $T_{\text{seek}}$ ,  $R_{\text{file}}$  and  $S_{\text{headers}}$ , the device comprising a read-buffer coupled to the head, the read-buffer having at least a size  $S_{\text{buffer,min}}$  determined taking  
5 into account the values of a read-out speed  $R_{\text{disc\_dev}}$  of the read unit for retrieving information from the track into the read-buffer, and a maximal seek time  $T_{\text{seek\_dev}}$  of the head for accessing information anywhere on the record carrier, and the maximal values of the properties  $R_{\text{file}}$  and  $S_{\text{headers}}$  for files to be played:  $R_{\text{file,max}}$  and  $S_{\text{headers,max}}$ .

According to a third aspect of the invention the object is achieved with a  
10 record carrier comprising a track that carries information as defined in the opening paragraph, the information being arranged in files, a file having properties at least including a maximal data rate  $R_{\text{file}}$  of the file for the real-time information in the file to be reproduced continuously, and a maximal size of header information  $S_{\text{headers}}$  that precedes and/or follows the real-time information in the file, and the track comprising continuous recording units at  
15 least having a size of  $S_{\text{extent}}$  at least taking into account the properties  $R_{\text{disc}}$ ,  $T_{\text{seek}}$ ,  $R_{\text{file}}$  and  $S_{\text{headers}}$ .

The effect of arranging the information in files is that data from different sources and at different moments can be recorded easily on the same record carrier, even allowing different formats for the files. For playing different files the connection between  
20 real-time data of the preceding file must be coupled to the real-time information of the succeeding file. While determining the size of the continuous recording unit, usually called extent, the size of the headers (and/or trailers following the real-time data) is taken into account. This results in real-time data from different files to be reproduced seamlessly.

The invention is also based on the following recognition. The known system  
25 provides a solution for real-time data recorded as a single unit of considerable playing time, for example a video program. When the user starts watching the program, or switches to a different program, a small waiting time is acceptable. For other data types this is still problematic, in particular for audio tracks following each other. The user will be easily irritated by interruptions of the audio between tracks, even if the interruption is short. The  
30 inventors have seen that the headers and/or trailers of files that are used for such recording are causing such interruptions, and have to be taken into account when determining the size of the extents.

In an embodiment of the device the allocation unit comprises an extent unit that contains a number of predefined extent sizes and corresponding maximal data rates

available for Rfile. This has the advantage that the predefined extent sizes can be selected to corresponds to an integral number of physical recording units such as ECC blocks or packets. No calculation has to be performed if the corresponding data rates can be easily retrieved from memory, e.g. from a table.

5 In an embodiment of the device the allocation unit comprises an extent unit for determining said minimal size or a maximal data rate for  $R_{file}$  based on:  $S_{extent} = ((T_{seek} + S_{headers} / R_{disc}) * R_{file} * R_{disc}) / (R_{disc} - R_{file})$ . This has the advantage that the actual size of the extent can be selected to be just above the minimum required for the actual file. Hence any spare area of the track can be used of the size is sufficient for the actual needed  $S_{extent}$ .

10 In an embodiment of the record carrier the files comprise a flag indicating whether two files are intended to be played seamless, in particular the file containing the flag and the previous one. In an embodiment of the device for reading information the read unit is arranged for reading said flag. Including such a flag in the files and reading it has the advantage that the device can set the reproduction circuitry, timing and buffering to  
15 accommodate such a seamless reproduction. Such flag may for example be used in files comprising consecutive songs from the same live concert.

Further preferred embodiments of the device and server entity according to the invention are given in the further claims.

20

These and other aspects of the invention will be apparent from and elucidated further with reference to the embodiments described by way of example in the following description and with reference to the accompanying drawings, in which

Figure 1a shows a record carrier (top view),  
25 Figure 1b shows a record carrier (cross section),  
Figure 2 shows a recording device,  
Figure 3 shows a table for selecting an extent size, and  
Figure 4 shows header information for an audio file.

In the Figures, elements which correspond to elements already described have  
30 the same reference numerals.

Figure 1a shows a disc-shaped record carrier 11 having a track 9 and a central hole 10. The track 9, being the position of the series of (to be) recorded marks representing

information, is arranged in accordance with a spiral pattern of turns constituting substantially parallel tracks on an information layer. The record carrier may be optically readable, called an optical disc, and has an information layer of read-only or a recordable type. An example of a read-only type is a CD, and examples of a recordable disc are the CD-R and CD-RW, and  
5 writable versions of DVD, such as DVD+RW, and the high density writable optical disc using blue lasers, called Blu-ray Disc (BD). Further details about the DVD disc can be found in reference: ECMA-267: 120 mm DVD – Read-Only Disc - (1997). The information is represented on the information layer by recording optically detectable marks along the track, e.g. crystalline or amorphous marks in phase change material. The track 9 on the recordable  
10 type of record carrier is indicated by a pre-embossed track structure provided during manufacture of the blank record carrier. The track structure comprises position information, e.g. addresses, for indication the location of units of information, usually called information blocks. The position information includes specific synchronizing marks for locating the start of such information blocks.

15 Figure 1b is a cross-section taken along the line b-b of the record carrier 11 of the recordable type, in which a transparent substrate 15 is provided with a recording layer 16 and a protective layer 17. The protective layer 17 may comprise a further substrate layer, for example as in DVD where the recording layer is at a 0.6 mm substrate and a further substrate of 0.6 mm is bonded to the back side thereof. A pregroove 14 enables a read/write head to  
20 follow the track during scanning. The pregroove for example constitutes the track structure. The pregroove 14 may be implemented as an indentation or an elevation of the substrate 15 material, or as a material property deviating from its surroundings.

The record carrier 11 may be intended for carrying information in files representing digitally encoded real-time information like LPCM, MP3, or video according to  
25 a standardized format like MPEG2.

The information on the disc is recorded in files, and physically in contiguous parts of the track called extents as described below. The files are formed according to predefined standards which define the properties. For the real-time information in the files at least a maximal data rate  $R_{\text{file}}$  of the file for the real-time information in the file to be  
30 reproduced continuously is defined. Further the files have additional control information, usually called headers, which include for the purpose of this document all additional information not included in the (multiplexed) real-time data stream. In particular according to the predefined file format for a specific application the maximal size of the total of header

information  $S_{\text{headers}}$  that precedes and/or follows the real-time information in the file is defined.

Figure 2 shows a recording device for writing information on a record carrier 11 of a type which is writable or re-writable, for example CD-R or CD-RW, or DVD+RW or BD. The device is provided with recording means for scanning the track on the record carrier which means include a drive unit 21 for rotating the record carrier 11, a head 22, a positioning unit 25 for coarsely positioning the head 22 in the radial direction on the track, and a control unit 20. The head 22 comprises an optical system of a known type for generating a radiation beam 24 guided through optical elements focused to a radiation spot 23 on a track of the information layer of the record carrier. The radiation beam 24 is generated by a radiation source, e.g. a laser diode. The head further comprises (not shown) a focusing actuator for moving the focus of the radiation beam 24 along the optical axis of said beam and a tracking actuator for fine positioning of the spot 23 in a radial direction on the center of the track. The tracking actuator may comprise coils for radially moving an optical element or may alternatively be arranged for changing the angle of a reflecting element. For writing information the radiation is controlled to create optically detectable marks in the recording layer. For reading the radiation reflected by the information layer is detected by a detector of a usual type, e.g. a four-quadrant diode, in the head 22 for generating a read signal and further detector signals including a tracking error and a focusing error signal for controlling said tracking and focusing actuators. The read signal is processed by read unit 30 of a usual type including a demodulator, deformatter and output unit to retrieve the information. Hence retrieving means for reading information include the drive unit 21, the head 22, the positioning unit 25 and the read unit 30. The device comprises write processing means for processing the input information to generate a write signal to drive the head 22, which means comprise an input unit 27, and modulator means comprising a formatter 28 and a write unit 29. The control unit 20 controls the recording and retrieving of information and may be arranged for receiving commands from a user or from a host computer. The control unit 20 is connected via control lines 26, e.g. a system bus, to said input unit 27, formatter 28 and write unit 29, to the read unit 30, and to the drive unit 21, and the positioning unit 25. The control unit 20 comprises control circuitry, for example a microprocessor, a program memory and control gates, for performing the procedures and functions according to the invention as described below. The control unit 20 may also be implemented as a state machine in logic circuits. The input unit 27 receives the user real-time information and processes the audio and/or video to blocks of information, which are passed to the formatter 28 for adding control

data and formatting the data according to the file format of the specific type of data, e.g. MP3 audio data. Real-time data may also be already formatted according to the file format, e.g. from a computer application or a copy of real-time information recorded on a different device, and may be interfaced to the formatter 28 directly. The formatted data from the output of the formatter 28 is passed to the write unit 29, which comprises for example a channel coder, for generating a modulated signal which drives the head 22. Further the write unit 29 comprises synchronizing means for including synchronizing patterns in the modulated signal. The formatted units presented to the input of the modulation unit 29 comprise address information and are written to corresponding addressable locations on the record carrier under the control of control unit 20. During the writing operation, marks representing the information are formed on the record carrier. The marks may be in any optically readable form, e.g. in the form of areas with a reflection coefficient different from their surroundings, obtained when recording in materials such as dye, alloy or phase change material, or in the form of areas with a direction of magnetization different from their surroundings, obtained when recording in magneto-optical material. Writing and reading of information for recording on optical disks and usable formatting, error correcting and channel coding rules are well-known in the art, e.g. from the CD system. The marks can be formed by means of the spot 23 generated on the recording layer via the beam 24 of electromagnetic radiation, usually from a laser diode. In an embodiment the input unit 27 comprises compression means for input signals such as analog audio and/or video, or digital uncompressed audio/video. Suitable compression means are described for video in the MPEG standards, MPEG-1 is defined in ISO/IEC 11172 and MPEG-2 is defined in ISO/IEC 13818. The input signal may alternatively be already encoded according to such standards.

The device has an allocation unit 35 coupled to the control unit 20 via the system bus 26 and coupled to the write unit 29 via formatter 28. The allocation unit 35 allocates contiguous part of the track to record continuous recording units called extents in available space in the track. To guarantee continuous playback in a predefined or standardized reading device the extents have to be of a minimum size as defined below. Thereto the allocation unit 35 is coupled to an extent unit 31 for determining the size of the extents. The extent unit 31 contains the information and rules for determining the extent size for the specific application file. The extent may be calculated according to the formula as described below, or may be selected from a table as shown in Figure 3. In particular the extent unit 31 is arranged for taking the size of the headers at the beginning of a file and/or at the end of a file into account.



The device as shown in Figure 2 further has a read-out function for reproducing data continuously. Thereto the read unit 30 is coupled to a read-out buffer 32 for receiving the data from the head 22 before the data is actually processed for continuous reproduction. The size of the buffer 32 is selected to be dependent on the extent calculation for said standardized reading device. Hence, if the actual reading function has a larger reading speed and/or a smaller seek time than the standardized device, the buffer may be smaller as calculated below. It is noted that a read device without recording function has the same elements as the recording device shown except the input unit 27, formatter 28 and write unit 29, and the allocation unit 35 and the extent unit 31.

For recording real-time information in files the following consideration applies. In the past, the consumer electronic (CE) and personal computer (PC) worlds were completely separate with regard to storage. In the CE world the tape model prevailed, meaning that the unit of data was the complete set of data (e.g. file) stored contiguously. In the PC world the random access model prevailed, meaning that the unit of data was a sector or block. The latter requires a file system relating sets of sectors to a file (complete set of data). The random access model is now entering the CE world, carrying file system technology. Seamless playback is a requirement in the CE world. If the tape model is used it is relatively easy to guarantee seamless playback even if resources are limited. The reason is that unpredictable seeks during playback do not occur. If the random access model is used without additional measures, seamless playback can typically not be guaranteed. Hence an allocation strategy is needed, in particular if different files have to be reproduced seamlessly.

It is proposed to have a rule based player model with limited extent size requirements, providing maximal freedom for drive design. The rule is derived based on the access method and required sustained application data rate necessary for seamless playback of a certain data stream in combination with basic drive parameters. The rules for playback of a single file are described in US 6,219,311 as described in the introduction. Given the application, e.g. compressed audio using a predefined file format, the access method and required sustained application data rate within the file are set. For reproducing consecutive files seamlessly the rule given below establishes which combination of drive parameters satisfies the seamless playback requirement for files including headers. Using the calculation described below different minimum extent sizes are possible for different application data rates and the drive designer can optimise the basic drive parameters to his particular requirements, e.g. bigger drive buffers or higher disc data rate versus lower maximum seek times, all without losing seamless playback guarantees. Advantages are that freedom is

offered with regard to the storing, deleting and editing of files while guaranteeing seamless playback even in resource constrained environments. Further the solution is file system independent, any generic file system can be used, and the rule tunes the minimal extent size to the actual bit rate required, thereby minimising the restrictions on allocation. In addition applications are able to determine whether a file is guaranteed to play seamlessly on any compliant device irrespective of its particular design, and the drive designer has more freedom in designing the drive or player. This enables the integrated optimisation with other requirements, e.g. power consumption. In particular the generic rule accommodates for file headers or other file components preceding or following the real-time data in the file that are not multiplexed into the stream. Such header data has to be read before or after the part of the file that contains the multiplexed stream of real-time data. For seamless playback of different files such headers must be included in the rule because the continuous reproduction requires sufficient data in the read-out buffer during reading said headers. The time for reading such headers is equal to the maximal size of the headers divided by the data rate  $R_{disc}$  of the disk reproducing system as defined in the standard, and can be added to the seek time in the formula. This addition allows continuous reproduction of consecutive files.

The allocation strategy for recording is based on requirements that enable a reference player to playback all tracks seamlessly in random order. The size of the minimal extent to be recorded continuously is:

$$S_{extent} = ((T_{seek} + S_{headers} / R_{disc}) * R_{file} * R_{disc}) / (R_{disc} - R_{file})$$

, wherein

- |    |               |  |
|----|---------------|--|
| 20 | $S_{extent}$  | is the minimum extent size,  |
|    | $S_{headers}$ | is the maximum size of headers at the beginning and/or end of a file           |
|    | $R_{file}$    | is the data rate as defined for the file required for reproducing the contents |
| 25 | $R_{disc}$    | is the maximum rate as defined for reading the disc                            |
|    | $T_{seek}$    | is the maximum seek time   |

If the minimum extent size is not achieved the track itself is not guaranteed to play seamlessly. For seamless playback within one file the size of the last extent is not relevant. However to guarantee seamless transitions to next tracks, the minimum extent size also applies to the last extent of a file. In an embodiment data trailing the last real-time data in the file is added to the header size  $S_{headers}$ . This is relevant if the trailer cannot be skipped by the rendering device.

Figure 3 shows a table for selecting an extent size. For a number of extent sizes in the left column the applicable maximal bit rate in kilobits (kbps) per second is given.

In the right column the data rate in KiloByte per second (KB/s) is given, which is calculated using one KiloByte = 8.192 bits. The extent sizes are based on a packet writing system that has a minimal packet size such as CD-RW having 64 KB. The packet size is the minimal amount of data that can be written. Only a limited number of sizes are given to accommodate different application types, which has the advantage that the complexity and memory use is limited. Such a table can be incorporated in the memory of the recorder, e.g. in said extent unit 31. The appropriate extent size can then be selected based on the data rate of the file of the application to be recorded.

Figure 4 shows header information for an audio file. The header information includes a number of parameters as listed below for controlling the process of rendering said file. The corresponding number of bits is given in the right column. The header info shown is called CD2\_main\_audio\_info(), and is part of a larger amount of header data. The total header size in practical circumstances may be limited to a fixed value to allow standardized authoring systems, e.g. 200 KB. For audio files intended for the CD system a practical limit is 64 KB, which is equal to the size of a packet. The following parameters are defined in the header:

**audio\_duration** – This field contains the total time duration of the CD2 main audio.

**entry\_time** – This field contains the length of a pre-track of the CD2 main audio.

**audio\_type** – This field indicates the type of audio in the CD2 main audio. Note that the CD2 main audio must always be present, so the value of 0 is not allowed for this field. The audio types may for example be:

Value	Audio type definition
0	No audio present
1	AAC encoded audio
2	ATRAC3 encoded audio
3	LPCM audio (corresponding to the standard CD system)
4	MP3 audio
5-255	Reserved

The encoding indicated as AAC, ATRAC3 or MP3 refers to standard audio encoding systems defined in well known standards.

**audio\_bit\_rate** – This field indicates the bit rate of the CD2 main audio

**sampling\_frequency** – This field indicates the sampling frequency of the CD2 main audio

**channel\_configuration** – This field indicates the channel configuration of the CD2 main audio according to predefined configurations, such as stereo or multichannel (discrete or matrixed)

5 **bits\_per\_sample** – This field indicates the bits per sample of the CD2 main audio. This field will contain the value 0x3 (Undefined) in case of non-LPCM audio.

**emphasis\_on** – This field indicates whether emphasis is on (1) or off (0) in the CD2 main audio. Emphasis\_on can only have a non-zero value in case of a sampling frequency of 44.1 kHz and LPCM audio.

10 **multiplexed\_lyrics\_present** – A 1-bit flag, which when set to '1' indicates that the main audio contains multiplexed lyrics in one or more text channels. It is noted that lyrics at the beginning or end of the file (hence not multiplexed) have to be included in the size of the headers  $S_{\text{headers}}$ .

15 **seamless\_play\_back** – A 1-bit flag, which when set to '1' indicates that the main audio of this Audio Track File and the previous one are meant for seamless play back. It is noted that this flag indicates whether two files are intended to be played seamless, in particular the file containing the flag and the previous one. This has the effect that the recording device can specifically indicate and the reading device can specifically set the seamless playback mode.

20 **n\_slideshow\_images** – This field contains the number of slideshow images present in the program stream containing the main audio. Note that slideshow images and further additional data added at the beginning or at the end of the file that are not included in the multiplexed stream have to be included in the size of the headers  $S_{\text{headers}}$ .

In an embodiment the effective data rate for the application is lower due to overhead dependent on the type of disc, e.g. packet overhead for a CD-RW.

25 The device is arranged for determining a disc type and determining the  $S_{\text{extent}}$  taking into account for  $R_{\text{disc}}$  the overhead in dependence of the disc type.

30 The relevant properties of the reference player must be predefined, e.g. in a standard, and may be for a CD type player: a maximum data rate of 300 KB/s ( $N=2$ ), and a maximum seek time of 1.5 s. In particular it is necessary to take the size of the largest headers into account as explained above for the extent. The time needed to read the buffers can be added to the seek time, and sufficient data space has to be present in the buffer to bridge the total time at the maximal speed  $R_{\text{file,max}}$  of the application to be reproduced. Headers include all data before and after the multiplexed stream of real-time data. It is noted that the minimum buffer size for a player can be calculated as follows:

$$S_{\text{buffer,min}} = ((T_{\text{seek}} + S_{\text{headers,max}}/R_{\text{disc}}) * R_{\text{file,max}})$$

, wherein

$S_{\text{headers,max}}$  is the largest header size of the files to be played, and

$R_{\text{file,max}}$  is the highest data rate of the files to be played

- For example at  $S_{\text{headers,max}} = 10$  kB and  $R_{\text{file,max}} = 172.27$  KB/s a buffer of 266
- 5 KB is needed for the reference player, while a more advanced player may exhibit a worst case seek of 1 s and a disc data rate of 600 KB/s in which case a buffer size of 176 KB is sufficient.

Although the invention has been mainly explained by embodiments using optical discs for storing audio, the invention is also suitable for recording video tracks or other real-time information or other disc type record carriers such as magnetic discs or any other rendering device for any type of information. It is noted, that in this document the verb 'comprise' and its conjugations do not exclude the presence of other elements or steps than those listed and the word 'a' or 'an' preceding an element does not exclude the presence of a plurality of such elements, that any reference signs do not limit the scope of the claims, that the invention may be implemented by means of both hardware and software, and that several 'means' or 'units' may be represented by the same item of hardware or software. Further, the scope of the invention is not limited to the embodiments, and the invention lies in each and every novel feature or combination of features described above.

## CLAIMS:

1. Device for recording information on a record carrier, the record carrier comprising a track for recording information, which information includes real-time information that is to be reproduced continuously via a rendering system having predefined properties at least including
  - 5 - a buffer coupled to a read-out unit,
  - a minimal read-out speed  $R_{disc}$  of the read-out unit for retrieving information from the track into the buffer, and
  - a maximal seek time  $T_{seek}$  for accessing information anywhere on the record carrier,
 the device comprising a head for scanning the track, and a write unit for
  - 10 recording information in the track via the head, the information being arranged in files, a file having properties at least including
    - a maximal data-rate  $R_{file}$  of the file for the real-time information in the file to be reproduced continuously, and
    - a maximal size of header information  $S_{headers}$  that precedes and/or follows the real-time
      - 15 information in the file,
 the device having an allocation unit for
    - determining a minimal size of an extent  $S_{extent}$  that is a continuous recording unit at least taking into account the properties  $R_{disc}$ ,  $T_{seek}$ ,  $R_{file}$  and  $S_{headers}$ , and
    - recording the information of the files in contiguous parts of the track at least having the
      - 20 size of  $S_{extent}$ .
2. Device as claimed in claim 1, wherein the allocation unit comprises an extent unit that contains a number of predefined extent sizes and corresponding maximal data rates available for  $R_{file}$ .
- 25 3. Device as claimed in claim 1, wherein the allocation unit comprises an extent unit for determining said minimal size or a maximal data rate for  $R_{file}$  based on:  $S_{extent} =$ 

$$((T_{seek} + S_{headers} / R_{disc}) * R_{file} * R_{disc}) / (R_{disc} - R_{file})$$

4. Device as claimed in claim 1, 2 or 3, wherein the device is arranged for determining a disc type and determining the  $S_{\text{extent}}$  taking into account for  $R_{\text{disc}}$  an overhead in dependence of the disc type, in particular a packet overhead for a re-writable disc type.
5. Device for reading information from a track on a record carrier, which information includes real-time information that is to be reproduced continuously via a rendering system having predefined properties at least including
- a buffer coupled to a read-out unit,
  - a minimal read-out speed  $R_{\text{disc}}$  of the read-out unit for retrieving information from the track into the buffer, and
  - a maximal seek time  $T_{\text{seek}}$  for accessing information anywhere on the record carrier,
- the device comprising a head for scanning the track, a read unit for reading information in the track via the head, the information being arranged in files, a file having properties at least including
- a maximal data rate  $R_{\text{file}}$  of the file for the real-time information in the file to be reproduced continuously,
  - a maximal size of header information  $S_{\text{headers}}$  that precedes and/or follows the real-time information in the file, and
  - being recorded in contiguous parts of the track at least having a size of  $S_{\text{extent}}$  at least taking into account the properties  $R_{\text{disc}}$ ,  $T_{\text{seek}}$ ,  $R_{\text{file}}$  and  $S_{\text{headers}}$ ,
- and a read-buffer coupled to the head, the read-buffer having at least a size  $S_{\text{buffer,min}}$  determined taking into account the values of
- a read-out speed  $R_{\text{disc\_dev}}$  of the read unit for retrieving information from the track into the read-buffer, and
  - a maximal seek time  $T_{\text{seek\_dev}}$  of the head for accessing information anywhere on the record carrier, and
  - the maximal values of the properties  $R_{\text{file}}$  and  $S_{\text{headers}}$  for files to be played:  $R_{\text{file,max}}$  and  $S_{\text{headers,max}}$ .
6. Device as claimed in claim 5, wherein the read-buffer has a size based on:
- $$S_{\text{buffer,min}} = ((t_{\text{seek,max}} + S_{\text{headers,max}}/R_{\text{disc,max}}) * R_{\text{file,max}}$$

7. Device as claimed in claim 5, wherein the read unit is arranged for reading a flag from the files indicating whether two files are intended to be played seamless, in particular the file containing the flag and the previous one.

- 5 8. Method for recording information on a record carrier, the record carrier comprising a track for recording information, which information includes real-time information that is to be reproduced continuously via a rendering system having predefined properties at least including
- a buffer coupled to a read-out unit,
  - 10 - a minimal read-out speed  $R_{disc}$  of the read-out unit for retrieving information from the track into the buffer, and
  - a maximal seek time  $T_{seek}$  for accessing information anywhere on the record carrier, and which information is arranged in files, a file having properties at least including
  - 15 - a maximal data rate  $R_{file}$  of the file for the real-time information in the file to be reproduced continuously, and
  - a maximal size of header information  $S_{headers}$  that precedes and/or follows the real-time information in the file,
- which method comprises
- 20 - determining a minimal size of an extent  $S_{extent}$  that is a continuous recording unit at least taking into account the properties  $R_{disc}$ ,  $T_{seek}$ ,  $R_{file}$  and  $S_{headers}$ , and
  - recording the information of the files in contiguous parts of the track at least having the size of  $S_{extent}$ .



25 9. Method as claimed in claim 8, wherein the method comprises a step of including a flag in the files indicating whether two files are intended to be played seamless, in particular the file containing the flag and the previous one.

10. Method as claimed in claim 8, wherein the maximal size of header information  
30  $S_{headers}$  is determined including additional data that precedes and/or follows the real-time information in the file, in particular lyrics information additional to an audio file.

11. Computer program product for recording information, which program is operative to cause a processor to perform the method as claimed in claim 8, 9 or 10.



12. Record carrier comprising a track that carries information, which information includes real-time information that is to be reproduced continuously via a rendering system having predefined properties at least including
- 5 - a buffer coupled to a read-out unit,  
- a minimal read-out speed  $R_{disc}$  of the read-out unit for retrieving information from the track into the buffer, and  
- a maximal seek time  $T_{seek}$  for accessing information anywhere on the record carrier, and which information is arranged in files, a file having properties at least
- 10 including  
- a maximal data rate  $R_{file}$  of the file for the real-time information in the file to be reproduced continuously, and  
- a maximal size of header information  $S_{headers}$  that precedes and/or follows the real-time information in the file, and
- 15 the track comprising continuous recording units at least having a size of  $S_{extent}$  at least taking into account the properties  $R_{disc}$ ,  $T_{seek}$ ,  $R_{file}$  and  $S_{headers}$ .
13. Record carrier as claimed in claim 12, wherein the files comprise a flag indicating whether two files are intended to be played seamless, in particular the file
- 20 containing the flag and the previous one.

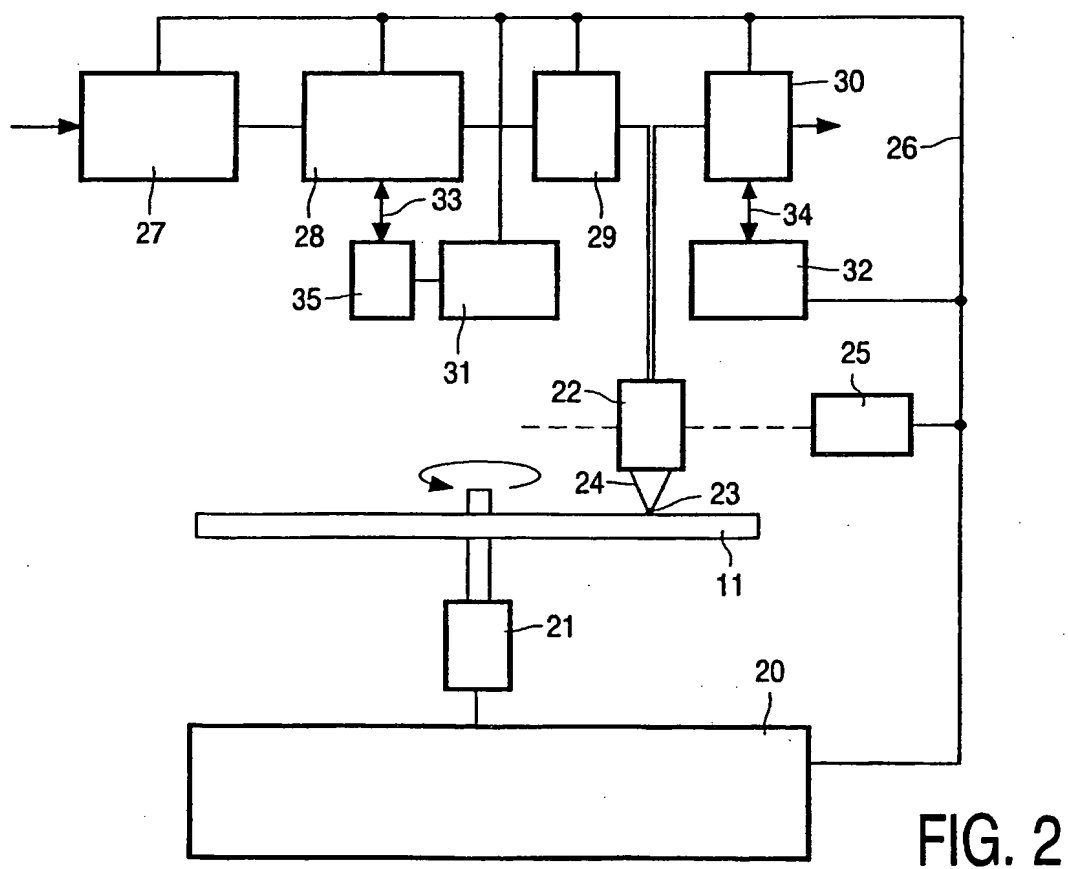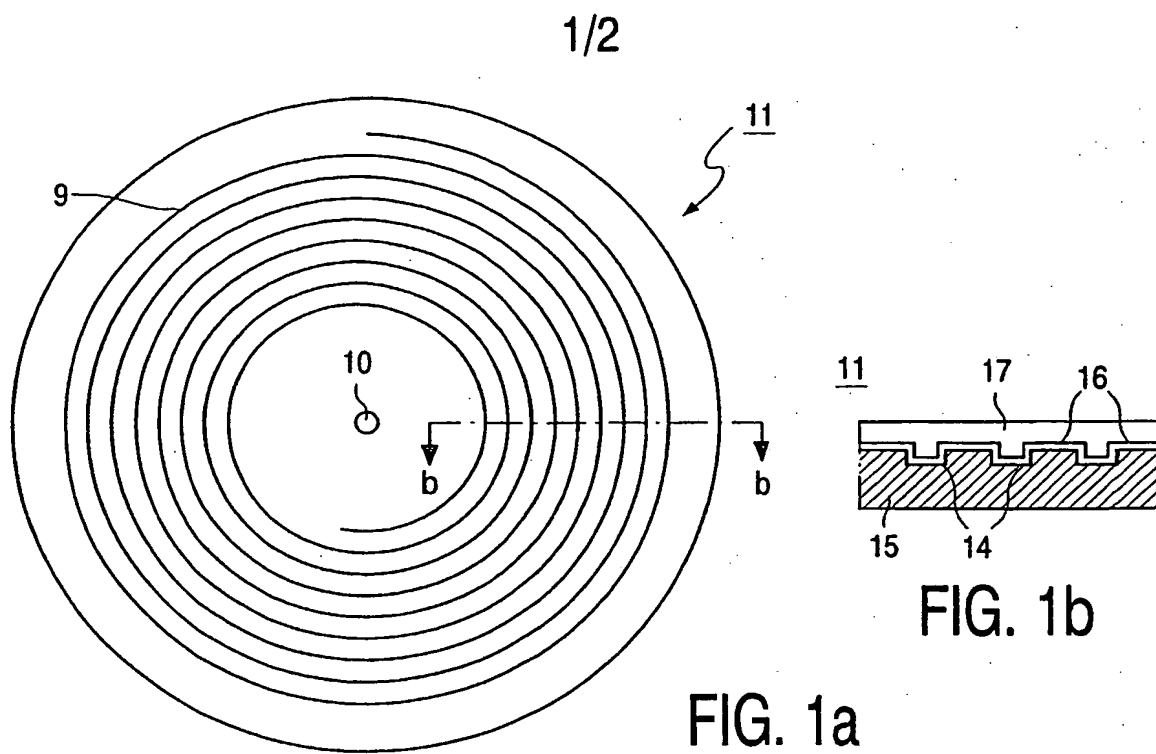

2/2

extent size [KB]	max. bit rate [kbps]	max. data rate [KB/s]
64	291.1	35.5
128	508.8	62.1
256	812.6	99.2
512	1158.4	141.4
1024	1471.5	179.6

FIG.3

Syntax	# bits
CD2_main_audio_info() {	
audio_duration	32
entry_time	32
audio_type	8
audio_bit_rate()	24
sampling_frequency	5
channel_configuration	3
bits_per_sample	2
emphasis_on	1
multiplexed_lyrics_present	1
seamless_play_back	1
reserved_0	3
n_slideshow_images	16
reserved_0	16*8
}	

FIG.4

## INTERNATIONAL SEARCH REPORT

PCT/IB 03/03556

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G11B20/12 G11B27/034 G11B27/32 G11B27/10 G11B27/34

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 1 150 293 A (SAMSUNG ELECTRONICS CO LTD) 31 October 2001 (2001-10-31) page 2, line 33 - line 36 page 7, line 2 - line 39 page 8, line 35 - line 51 figures 3A-3D,7	1-13
Y	EP 0 903 744 A (MATSUSHITA ELECTRIC IND CO LTD) 24 March 1999 (1999-03-24) page 11, line 47 -page 12, line 2 page 17, line 30 - line 55 page 35, line 9 -page 37, line 15 figures 6C-6H	1-13
A	US 6 219 311 B1 (MITSUNO MAKOTO) 17 April 2001 (2001-04-17) cited in the application the whole document	1-13
	--- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

2 December 2003

Date of mailing of the international search report

11/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Barel-Faucheux, C

## INTERNATIONAL SEARCH REPORT

PCT/IB 03/03556

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 389 570 B1 (KIM BYUNG-JUN ET AL) 14 May 2002 (2002-05-14) column 4, line 27 -column 5, line 28 column 7, line 1 - line 5 figures 3A-3D,7 ----	1-13
A	EP 0 953 977 A (SAMSUNG ELECTRONICS CO LTD) 3 November 1999 (1999-11-03) page 4, line 25 -page 5, line 7 page 6, line 9 - line 15 figures 3A-3D,7 ----	1-13
A	US 2001/054168 A1 (KIM BYUNG-JUN ET AL) 20 December 2001 (2001-12-20) the whole document ----	1-13
A	DE 199 09 367 A (THOMSON BRANDT GMBH) 7 September 2000 (2000-09-07) the whole document ----	1-13
A	US 6 353 704 B1 (TAMAKOSHI YASUSHI ET AL) 5 March 2002 (2002-03-05) the whole document -----	1-13

## INTERNATIONAL SEARCH REPORT

PCT/IB 03/03556

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1150293	A	31-10-2001	EP 1150293 A1	31-10-2001
			EP 1150294 A1	31-10-2001
			EP 1150295 A1	31-10-2001
			EP 1249838 A1	16-10-2002
			EP 1265240 A1	11-12-2002
			EP 1306846 A2	02-05-2003
			EP 1306847 A2	02-05-2003
			BR 9901410 A	18-01-2000
			CN 1393874 A	29-01-2003
			CN 1393875 A	29-01-2003
			CN 1393876 A	29-01-2003
			CN 1393877 A	29-01-2003
			CN 1393878 A	29-01-2003
			CN 1236950 A ,B	01-12-1999
			DE 69906176 D1	30-04-2003
			EP 0953977 A1	03-11-1999
			JP 2000030253 A	28-01-2000
			JP 2002074856 A	15-03-2002
			JP 2001320662 A	16-11-2001
			JP 2001320663 A	16-11-2001
			JP 2003059203 A	28-02-2003
			SG 93201 A1	17-12-2002
			TW 444188 B	01-07-2001
			US 6389569 B1	14-05-2002
			US 6389570 B1	14-05-2002
			US 2001054168 A1	20-12-2001
EP 0903744	A	24-03-1999	CA 2247626 A1	17-03-1999
			DE 69800480 D1	15-02-2001
			DE 69800480 T2	13-06-2001
			EP 1020862 A2	19-07-2000
			EP 0903744 A2	24-03-1999
			WO 9914935 A2	25-03-1999
			JP 3050311 B2	12-06-2000
			JP 11187354 A	09-07-1999
			JP 2000152180 A	30-05-2000
			JP 3050317 B2	12-06-2000
			JP 2000152181 A	30-05-2000
			JP 3050318 B2	12-06-2000
			JP 2000152182 A	30-05-2000
			JP 3050319 B2	12-06-2000
			JP 2000152183 A	30-05-2000
			JP 2002093125 A	29-03-2002
			TW 432372 B	01-05-2001
			US 6181870 B1	30-01-2001
			US 2003175012 A1	18-09-2003
			US 6493505 B1	10-12-2002
US 6219311	B1	17-04-2001	WO 9913469 A1	18-03-1999
			US 2001012246 A1	09-08-2001
US 6389570	B1	14-05-2002	BR 9901410 A	18-01-2000
			CN 1393874 A	29-01-2003
			CN 1393875 A	29-01-2003
			CN 1393876 A	29-01-2003
			CN 1393877 A	29-01-2003

## INTERNATIONAL SEARCH REPORT

PCT/IB 03/03556

Patent document cited in search report		Publication date	Patent family member(s)	Publication date		
US 6389570	B1		CN 1393878 A	29-01-2003		
			CN 1236950 A ,B	01-12-1999		
			DE 69906176 D1	30-04-2003		
			EP 1150293 A1	31-10-2001		
			EP 1150294 A1	31-10-2001		
			EP 1150295 A1	31-10-2001		
			EP 1249838 A1	16-10-2002		
			EP 1265240 A1	11-12-2002		
			EP 1306846 A2	02-05-2003		
			EP 1306847 A2	02-05-2003		
			EP 0953977 A1	03-11-1999		
			JP 2000030253 A	28-01-2000		
			JP 2002074856 A	15-03-2002		
			JP 2001320662 A	16-11-2001		
			JP 2001320663 A	16-11-2001		
			JP 2003059203 A	28-02-2003		
			SG 93201 A1	17-12-2002		
			TW 444188 B	01-07-2001		
			US 6389569 B1	14-05-2002		
			US 2001054168 A1	20-12-2001		
		<hr/>				
		EP 0953977	A	03-11-1999	BR 9901410 A	18-01-2000
					CN 1393874 A	29-01-2003
CN 1393875 A	29-01-2003					
CN 1393876 A	29-01-2003					
CN 1393877 A	29-01-2003					
CN 1393878 A	29-01-2003					
CN 1236950 A ,B	01-12-1999					
DE 69906176 D1	30-04-2003					
EP 1150293 A1	31-10-2001					
EP 1150294 A1	31-10-2001					
EP 1150295 A1	31-10-2001					
EP 1249838 A1	16-10-2002					
EP 1265240 A1	11-12-2002					
EP 1306846 A2	02-05-2003					
EP 1306847 A2	02-05-2003					
EP 0953977 A1	03-11-1999					
JP 2000030253 A	28-01-2000					
JP 2002074856 A	15-03-2002					
JP 2001320662 A	16-11-2001					
JP 2001320663 A	16-11-2001					
JP 2003059203 A	28-02-2003					
SG 93201 A1	17-12-2002					
TW 444188 B	01-07-2001					
US 6389569 B1	14-05-2002					
US 6389570 B1	14-05-2002					
US 2001054168 A1	20-12-2001					
<hr/>						
US 2001054168	A1	20-12-2001	BR 9901410 A	18-01-2000		
			CN 1393874 A	29-01-2003		
			CN 1393875 A	29-01-2003		
			CN 1393876 A	29-01-2003		
			CN 1393877 A	29-01-2003		
			CN 1393878 A	29-01-2003		
			CN 1236950 A ,B	01-12-1999		
			DE 69906176 D1	30-04-2003		
			EP 1150293 A1	31-10-2001		
			EP 1150294 A1	31-10-2001		

## INTERNATIONAL SEARCH REPORT

PCT/IB 03/03556

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2001054168 A1		EP 1150295 A1	31-10-2001
		EP 1249838 A1	16-10-2002
		EP 1265240 A1	11-12-2002
		EP 1306846 A2	02-05-2003
		EP 1306847 A2	02-05-2003
		EP 0953977 A1	03-11-1999
		JP 2000030253 A	28-01-2000
		JP 2002074856 A	15-03-2002
		JP 2001320662 A	16-11-2001
		JP 2001320663 A	16-11-2001
		JP 2003059203 A	28-02-2003
		SG 93201 A1	17-12-2002
		TW 444188 B	01-07-2001
		US 6389569 B1	14-05-2002
		US 6389570 B1	14-05-2002
DE 19909367 A	07-09-2000	DE 19909367 A1	07-09-2000
		AT 239969 T	15-05-2003
		AU 4287000 A	21-09-2000
		CN 1341260 T	20-03-2002
		DE 60002572 D1	12-06-2003
		DE 60002572 T2	27-11-2003
		WO 0052689 A1	08-09-2000
		EP 1166267 A1	02-01-2002
		JP 2002538573 A	12-11-2002
		TW 498311 B	11-08-2002
US 6353704 B1	05-03-2002	US 6285827 B1	04-09-2001
		US 2001043804 A1	22-11-2001
		US 2001043805 A1	22-11-2001
		CA 2247601 A1	17-03-1999
		CN 1434437 A	06-08-2003
		DE 69800526 D1	22-03-2001
		DE 69809461 D1	19-12-2002
		DE 69809461 T2	08-05-2003
		DE 69809463 D1	19-12-2002
		DE 69809463 T2	08-05-2003
		EP 1020860 A2	19-07-2000
		EP 1020861 A2	19-07-2000
		EP 1213721 A2	12-06-2002
		EP 1213722 A2	12-06-2002
		EP 0905699 A2	31-03-1999
		WO 9914755 A2	25-03-1999
		JP 3069324 B2	24-07-2000
		JP 2000013728 A	14-01-2000
		JP 3108070 B2	13-11-2000
		JP 2000188731 A	04-07-2000
		JP 3108071 B2	13-11-2000
		JP 2000188732 A	04-07-2000
		JP 3108072 B2	13-11-2000
		JP 2000188733 A	04-07-2000
		JP 3420155 B2	23-06-2003
		JP 2000201320 A	18-07-2000
		JP 3420223 B2	23-06-2003
		JP 2002109833 A	12-04-2002
		JP 2002117629 A	19-04-2002
		TW 388827 B	01-05-2000
		US 6118924 A	12-09-2000